

Fibre Channel Module

SSMTT-30Z/SSMTT-30ZL

Data Sheet



The SSMTT-30Z Fibre Channel Module, part of the SunSet® Modular Test Toolkit (MTT) family of products, is a rugged, battery-operated handheld test solution for the installation and maintenance of Storage Area Network (SAN) services such as Fibre Channel, ESCON, and FICON. A complete set of testing capabilities makes the SSMTT-30Z ideal for the field technician who needs to verify end-to-end transport of Fibre Channel, ESCON, and Layer 2 FICON traffic, perform BER tests, determine throughput, link utilization, and round trip delay.

The intuitive user interface of the SSMTT-30Z, allows technicians with limited SAN testing experience to verify performance parameters for Fibre Channel, ESCON, and FICON services. The test functionalities of the SSMTT-30Z Fibre Channel Module provides all of the tools needed for verifying Service Level Agreements (SLAs) between service providers and their customers.

KEY FEATURES


- Full Fibre Channel (1.0625, 2.125 and 4.25 Gbps) line rate traffic generation
- Full ESCON (200 Mbps) line rate traffic generation
- BER testing at Layer 1 and Layer 2 for Fibre Channel, FICON, and ESCON services
- Round trip delay measurements
- Fibre Channel buffer-to-buffer credit management
- Fibre Channel Fabric login and N_Port login for connecting and testing through a Fibre Channel switch fabric
- Fibre Channel monitor mode for in-service monitoring
- Automated test suite based on RFC2544
- Test profiles for fast and efficient test set configuration and operation

BENEFITS

- Lightweight
- Flexible modular design
- Eliminates the need for multiple instruments
- Complete solution for Installation & Maintenance (I&M) of Fibre Channel, ESCON, and FICON services
- Leverages existing MTT platform
- Cost-effective and future-proof

TEST FEATURES

- Enables service providers and operators to turn-up and troubleshoot Fibre Channel, FICON, and ESCON services
- Allows service providers to verify SLAs between themselves and their customers
- Layer 2 header configuration parameters for specific Fibre Channel and ESCON traffic testing
- Simple user interface that is consistent with SSMTT

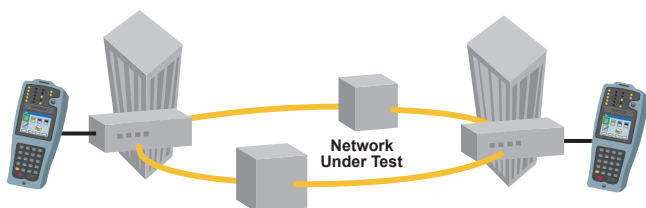

*SAN Testing Application:
End-to-end Fibre Channel Transport verification*

SPECIFICATIONS

Connectivity

Fibre Channel per ANSI INCITS 230

Data rate: 1.0625 Gbps/2.125 Gbps/4.25 Gbps
Connector type: Dual (SSMTT-30Z), Single (SSMTT-30ZL) Duplex LC
Optical transceiver type: SFP field interchangeable

SA584-850

1.0625 / 2.125 / 4.25 Gb/s Fibre Channel

Transmitter

- Wavelength: 830 to 860 nm multi-mode
- Power: -9 dBm to -2.5 dBm max.

Receiver

- Wavelength: 770 to 860 nm
- Power: -20 to 0 dBm max.

SA584-1310

1.0625 / 2.125 / 4.25 Gb/s Fibre Channel

Transmitter

- Wavelength: 1285 nm to 1345 nm single-mode
- Power: -3 dBm max.

Receiver

- Wavelength: 1260nm to 1600 nm
- Power: -22 to 0 dBm max.

ESCON per SA23-0394 (Optional Interface)

Data rate: 200 MBaud
Connector type: Duplex LC
Optical transceiver type: SFP field interchangeable

SA580-ESCON: 1310 nm multi-mode

Transmitter

- Wavelength: 1310 nm LED multi-mode
- Power: -20.5 dBm to -15 dBm

Receiver

- Wavelength: 1260 to 1380 nm
- Signal: -29 to -14 dBm max

Operation Mode

Point-to-Point mode
Link Initialization enabled or disabled (Fibre Channel, FC-2 Layer)
Monitor mode (SSMTT-30Z only)

BER Testing (Fibre Channel/FICON)

Traffic Generation

Fibre Channel: Unframed/FC-0/FC-1/FC-2 testing
FICON: FC-2 testing

End-to-end testing with two test sets

Single-ended testing with loop on the other end

Configurable FC-2 header

FC-2 Fabric Login, N_Port Login and E_Port Login

Test Patterns

Framed: All 1s, All 0s, Alt1010, CSPAT, CRPAT, CJTPAT, 2e31, 2e23, 2e20, 2e15 and User Defined (32 bits)

Unframed: High frequency, Mixed frequency, and Low frequency patterns or User Defined (4 bytes)

Frame length: 28 to 2140 bytes

Frame rate: From 1% to 100% bandwidth

Buffer-to-Buffer credits: 1 to 65535 (with Link Initialization enabled)

Traffic shaping: Constant, ramp, or burst

Error injection: Bit and CRC single errors or error rate injection, 8B/10B symbol errors. No_RRDY injection when buffer-to-buffer credits are configured.

Test duration

Measurements

Performance statistics: Transmitted and received bandwidth utilization (Min, Max, Average), frame rate (Min, Max, Average)

Frame statistics: Total number of transmitted and received frames, number of lost frames, out of sequence frames, number of undersized frames, number of oversized frames, number of transmitted and received R_RDY frames, and number of buffer-to-buffer credit available

Link statistics: Bit errors, CRC errors, 8B/10B symbol and disparity errors, loss of signal and loss of signal seconds counters, loss of synchronization, loss of pattern synchronization counters

Events recorder with timestamp

BER Testing (ESCON)

Traffic Generation

ESCON: Layer 1 and Layer 2 testing

End-to-end testing with two test sets

Single-ended testing with loop on the other end

Configurable Destination Link and Logical addresses

Configurable Source Link and Logical addresses

Test Patterns

Fixed: All 1s, All 0s, 1010, and Alt1010

User defined: 32-bit

PRBS: 2e31, 2e23, 2e20, and 2e15

Frame length: 12 to 1035 bytes

Frame rate: From 0% to 100% bandwidth

Traffic shaping: Constant, ramp, or burst

Error injection: Bit and CRC burst or continuous error injection

Test duration

Measurements

Performance statistics: Transmitted and received bandwidth utilization (Min, Max, Average), frame rate (Min, Max, Average)

Frame statistics: Total number of transmitted and received frames, number of lost frames, out of sequence frames*

Link statistics: Bit errors, CRC errors, symbol and disparity errors, loss of signal, loss of synchronization, loss of pattern synchronization counters

Events recorder with timestamp

Round Trip Delay Measurement

Fibre Channel and ESCON: With 1 micro-second resolution latency measurement

Monitoring and Analysis (SSMTT-30Z only)

Fibre Channel

In-service monitoring with or without splitter

Measurements

Signal and Frame Synchronization

Rx Data Rate (Min, Max, Average)

Rx Frames received, Rx Frames per second (Min, Max, Average)

CRC, Symbol, Disparity errors

Loss of Signal and Loss of Synchronization

Optical Power Measurement

Events recorder with timestamp.

PRODUCT DESCRIPTION

Module Size (W×L×H): 5.0 × 3.5 × 0.9 in (12.6 × 9 × 2.2 cm)

Operating Temperature: 32° to 122°F (0° to 50°C)

Storage Temperature: -4° to 158°F (-20° to 70°C)

Humidity: 5% to 85% noncondensing

ORDERING INFORMATION

SSMTT-30Z	Dual Port Fibre Channel Module (Includes software support for 1, 2 and 4 Gbps Fibre Channel protocol)
SSMTT-30ZL	Single Port Fibre Channel Module (Includes software support for 1, 2 and 4 Gbps Fibre Channel protocol)
SSMTT-30Z-ESCON	ESCON option for the Fibre Channel Module
SSMTT-30Z-UP	Trade-in of SSMTT-30-C to SSMTT-30Z
SSMTT-30ZL-UP	Trade-in of SSMTT-30L-E to SSMTT-30ZL
SA584-850	850 nm LC SFP Field Interchangeable Optical Transceiver
SA584-1310	1310 nm LC SFP Field Interchangeable Optical Transceiver
SA580-ESCON	ESCON 1310 nm multi-mode Optical Transceiver



SUNRISE TELECOM®

We Make Networks Work

For more information or a directory of sales offices: info@sunrisetelecom.com www.sunrisetelecom.com

